

THE ICONIC FORD FALCON XB GT

SCALE
1:8



Fireproof Wall Fittings

Published weekly
UK: £10.99 AUS: \$21.99



POST-APOCALYPTIC EDITION

THE ICONIC FORD FALCON XB GT

ISSUE 84

ASSEMBLY GUIDE

3

Brake parts and the windscreen wiper motor are fitted to the fireproof wall, which is then fitted to the chassis assembly.

YOUR MODEL

You will be building a 1:8 scale replica of a customised 1973 Ford Falcon XB GT. Features include a lift-up bonnet that reveals a detailed engine, opening doors, wind-down windows and an 'active' steering wheel. A remote-control fob illuminates the main lights, brake lights and indicators.

Scale: 1:8
Length: 62cm
Width: 25cm
Height: 19cm
Weight: 7+kg



Ford Motor Company
trademarks and trade dress
used under licence to GRE
for Groupe ELIGOR

CUSTOMER SERVICE, SUBSCRIPTIONS & BACK ORDERS

Please visit hachettepartworks.com/contact to get in touch.

Published by Hachette Partworks Ltd
4th Floor, Jordan House, 47 Brunswick Place,
London, N1 6EB
www.hachettepartworks.com



© 2026 Hachette Partworks Ltd
© 2026 Ford Motor Company
Distributed in the UK and Republic of Ireland by Marketforce.
Printed in the United Kingdom
ISSN 2976-5811

Complete in 130 issues.

ALL RIGHTS RESERVED

Items may vary from those shown.
All parts belong to a kit. Collectors' item for adults. Not suitable for children under 14. Some parts may have sharp edges, please handle them with care.

The installation of electronic parts must always be carried out by an adult. When replacing batteries, use the same type of batteries. Please ensure that the battery compartment is securely fastened before you use the model again. Used batteries should be recycled. Please make sure to check with your local council how batteries should be disposed of in your area. Batteries can present a choking danger to small children and may cause serious harm if ingested. Do not leave them lying around and keep any spare batteries locked away at all times.

The editor's policy is to use papers that are natural, renewable and recyclable products and made from wood grown in sustainable forests. The logging and manufacturing processes are expected to conform to the environmental regulations of the country of origin.

In the event of a significant increase in production and transport costs, the publisher reserves the right to modify its selling prices.

MANAGING DIRECTOR – Isabelle Couderc
EDITORIAL DIRECTOR – Helen Nally
MARKETING DIRECTOR – Elise Windmill
PRODUCTION DIRECTOR – Sema Sant Anna
SENIOR PRODUCTION MANAGER – Lee Matthews
MANAGING EDITOR – Sarah Gale
PROJECT EDITOR – Gary Webb
DISTRIBUTION MANAGER – Paul Smith
PRODUCT MANAGER – Rhys Myrner



For our
environmental
policy in full
please scan the
QR code here



**NOT SUITABLE FOR CHILDREN
UNDER THE AGE OF 14.**
This product is not a toy and is
not intended for use in play.

Editorial and design: Windmill Books Ltd

Picture credits:
Front cover: Jess Esposito and David Burton, main;
Richard Bryden, bl; Shutterstock, Steven Giles, background.
Step-by-step photography: Richard Bryden.
Model photography: Jess Esposito and David Burton.

Windmill Books has made every attempt to contact the copyright holder, if you have any information please contact Sophie Mortimer: smortimer@windmillbooks.co.uk

t=top, c=centre, b=bottom, l=left, r=right, u=upper

Stage 84: Fireproof Wall Fittings

Brake parts and the windscreen wiper motor are fitted to the fireproof wall, which is then fitted to the assembly.




List of parts:

- 84A** Brake servo housing
- 84B** Windshield wiper motor
- 84C** Brake fluid reservoir
- 84D** Brake fluid reservoir cover
- 84E** Canister
- 84F** Vacuum hose
- PS11** Four* 2.3 x 4mm PWB screws
- PS14** Five* 1.8 x 4mm PB screws

* Including spare
 PWB = Flange head for plastic
 PB = Pan head for plastic

Area of assembly

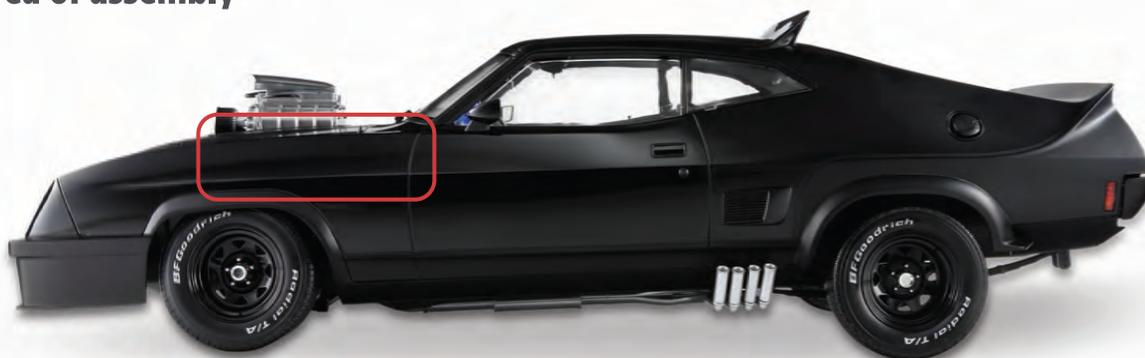


Stage 84: Fireproof Wall Fittings



STEP 1

Take the brake fluid reservoir **84B** and fit the cover **84D**. This is a push-fit connection.

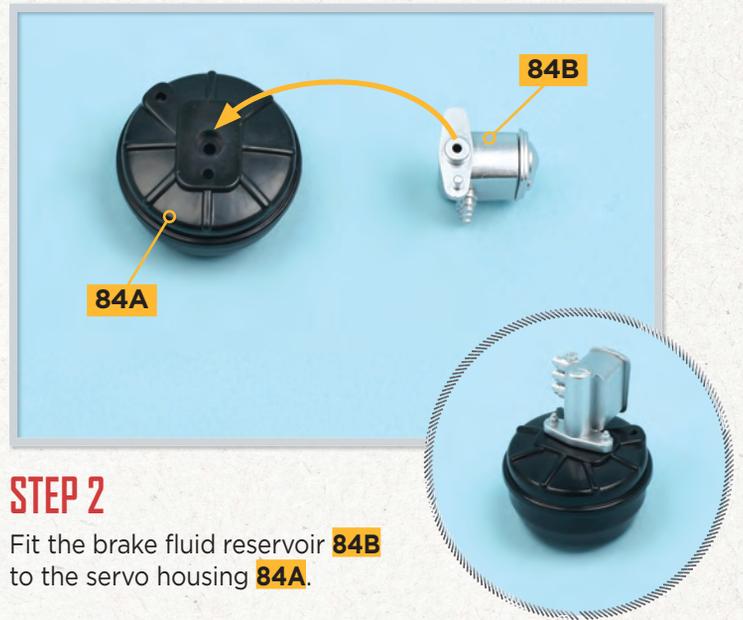

STEP 2

Fit the brake fluid reservoir **84B** to the servo housing **84A**.




STEP 3

Fix in place from the inside of the servo housing **84A** with a **PS14** screw.



STEP 4


Fit the servo holder **84A** to the back of the firewall **83A**, assembled in the previous issue. Raised screw sockets on part **84A** align with screw holes in part **83A** (arrows).

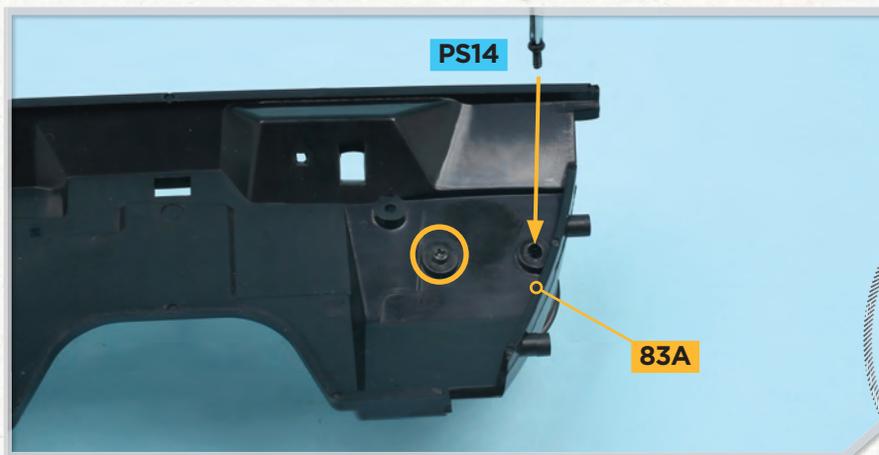

STEP 5


Turn part **83A** over and fix part **84A** in place with two **PS14** screws.



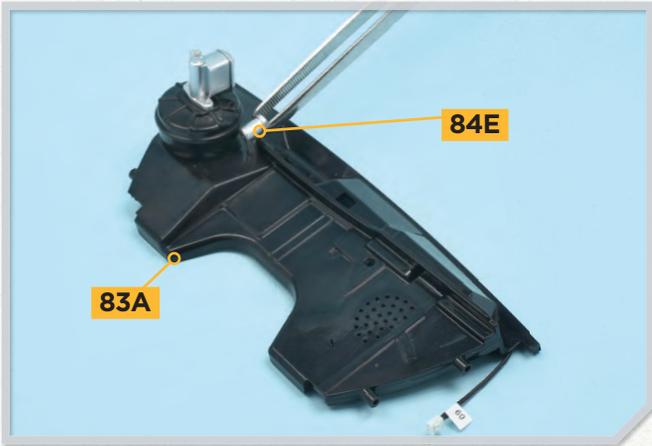


STEP 6

Fit the canister **84E** to the fireproof wall **83A**. The peg on part **84E** is shaped to fit in the corresponding hole in part **83A**.

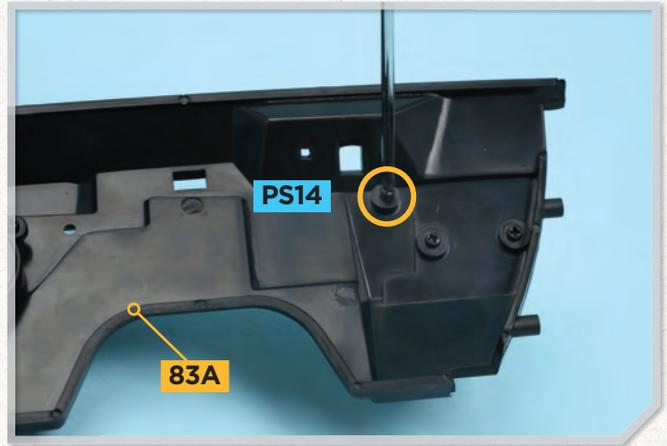


STEP 7

Turn part **83A** over and fix the canister **84E** in place with a **PS14** screw.

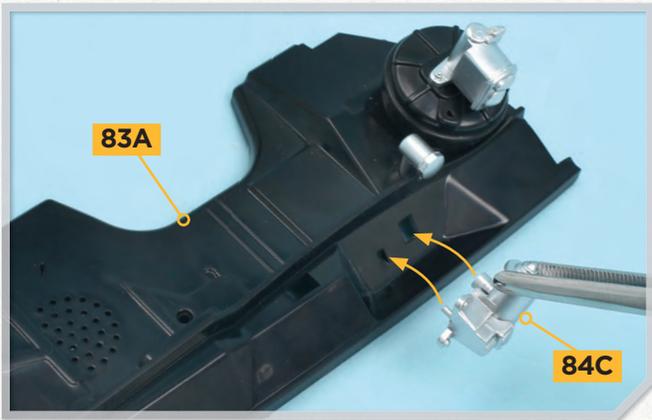

STEP 8

Fit the wiper motor **84C** to the fireproof wall **83A**. A small peg and raised screw socket on part **84C** fit in corresponding holes in part **83A**.

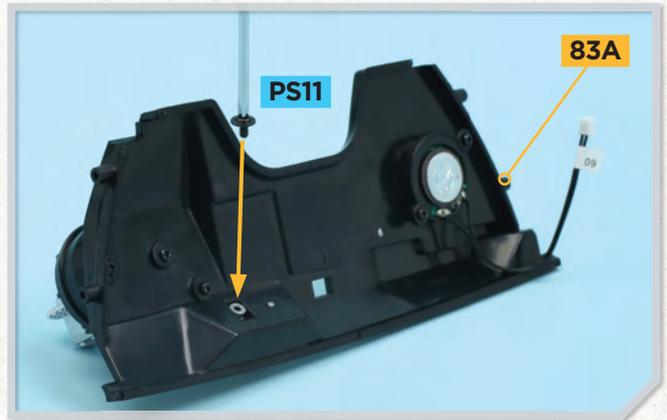

STEP 9


Fix the motor **84C** in place on the fireproof wall **83A** with a **PS11** screw.



STEP 10


Take the vacuum hose **84F** and fit the small peg on the shaped end of the hose into the hole in the servo housing **84A**.

Stage 84: Fireproof Wall Fittings

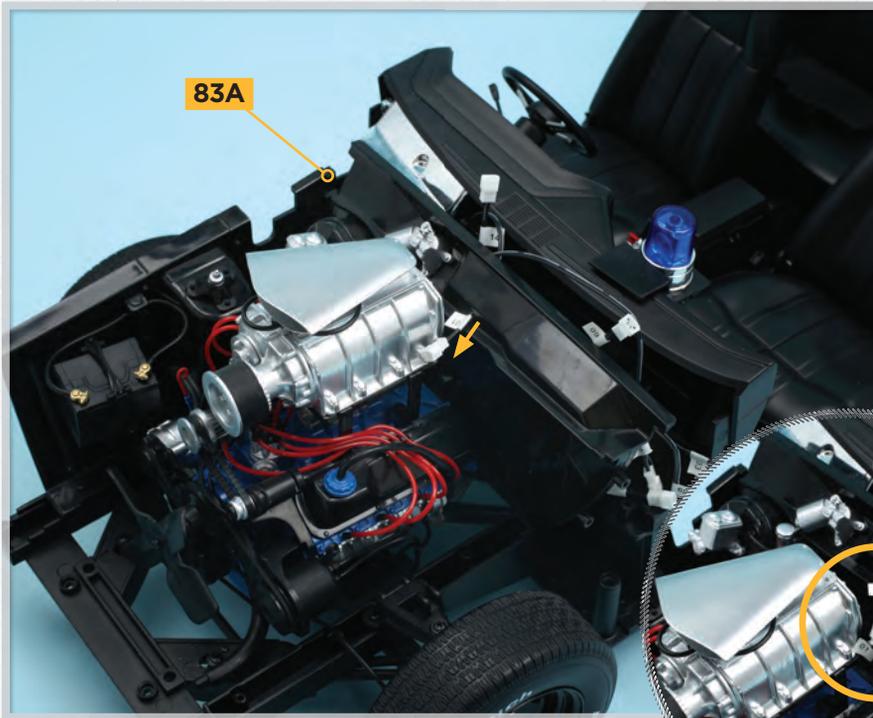


STEP 11

Position the fireproof wall **83A** across the assembly from issue 82, between the engine and the dashboard. It is not fixed at this stage. Thread the cable marked 01 through the rectangular opening at the top of part **83A** (yellow arrow, left). Connect the two cables marked 01 (circled in yellow, below) and the two cables marked 09 (circled in blue).

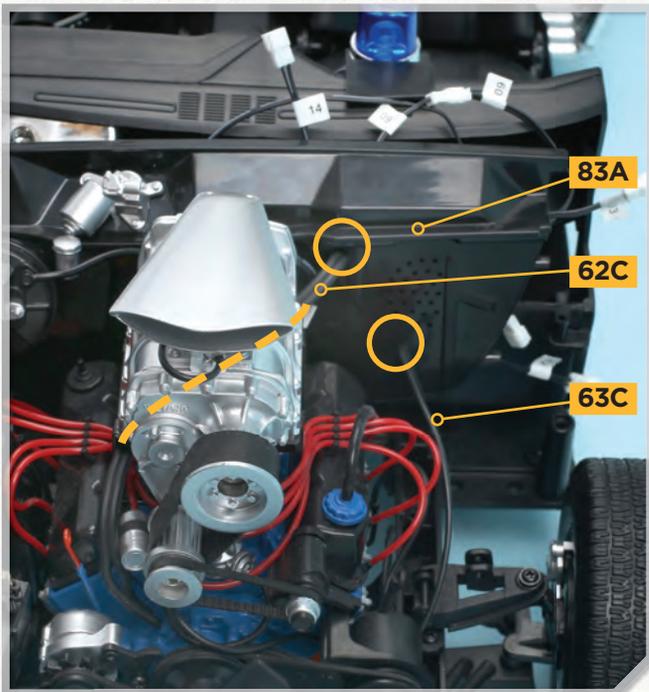


STEP 12

Fit the end of hose **63C (110mm)** to a peg on part **83A** and fit the end of the hose **62C** into a socket in part **83A**. You may need to thread the hose **62C** beneath the engine, as indicated by the dotted line.

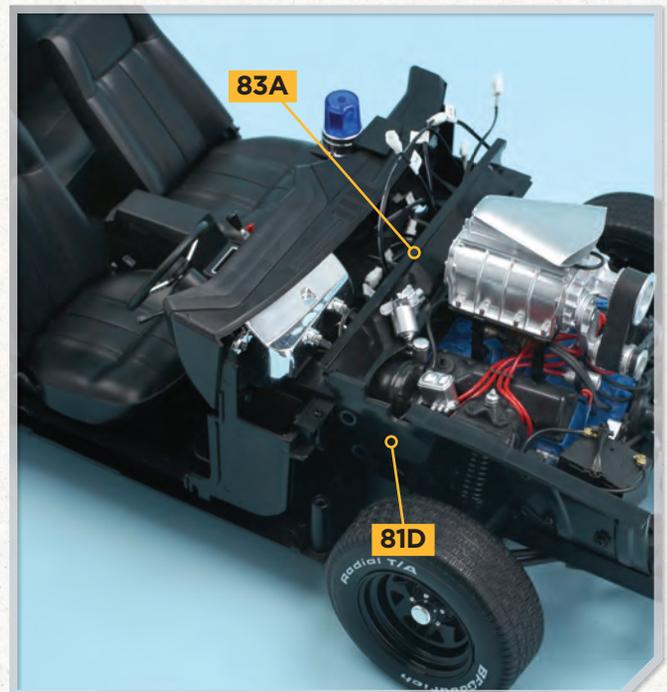

STEP 13

Ease the lower edge of the fireproof wall **83A** into position, ensuring that all cables are drawn back behind the wall, and none are trapped. Two raised screw sockets on the right-hand end of part **83A** fit into screw holes in the side wall **81D**.

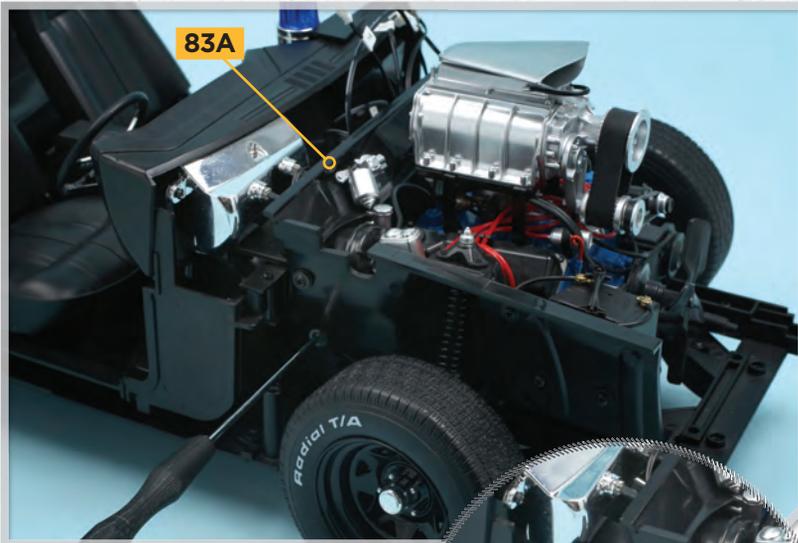

STEP 14

When you are happy with the position of the wall **83A** fix it in place with two **PS11** screws (as indicated, inset right).



STEP 15

Fit the hose **84F** (from the brake servo housing) into the recess in the top of the engine block.

COMPLETED ASSEMBLY

Fittings have been added to the fireproof wall, which has then been fixed in front of the dashboard.



COMING IN ISSUE 85




• ASSEMBLY GUIDE

The second shock absorber is fitted, along with a fluid container and horn. The left engine bay wall is attached to the chassis.

NEW PARTS

Shock absorber rod, pin, shock absorber tube, fluid tank, engine bay wall (left), spring, shock absorber mount, horn and screws.

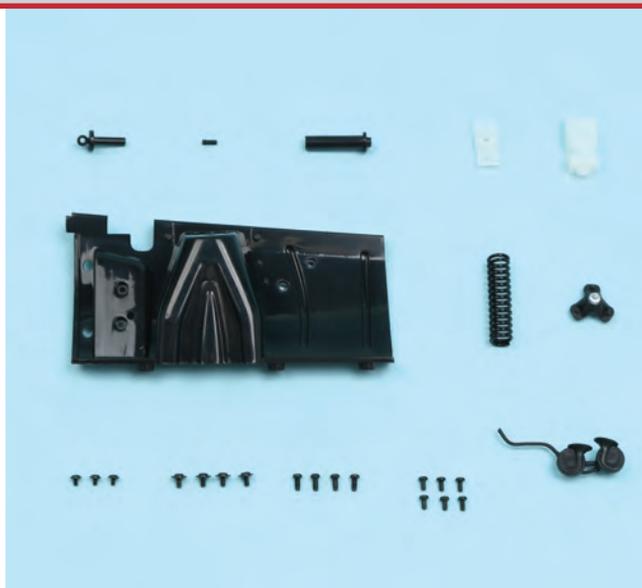

Published weekly
UK: £10.99
AUS: \$21.99



hachettepartworks.com/FordFalcon